
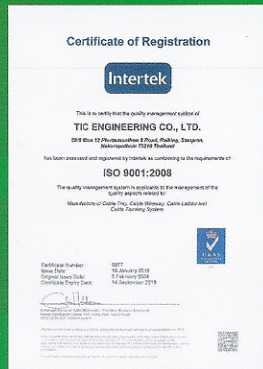


TIC GROUP

NEW PRODUCT

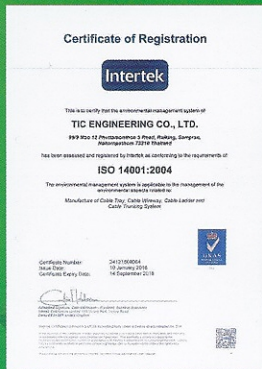

STRAIGHT PERFORATED TRAY

SCREW ON LID PERFORATED TRAY

PRODUCT DETAILS

**NEW
PRODUCT**

TIC

TIC PERFORATED TRAY is manufactured from steel sheet 1.2 mm. thickness. Tray has holes continuously dia 3 mm. every spacing 5 mm. punched along the length to provide maximum airflow around the cables and also help to secure cable with cable ties.

(Punched Total Area > 50% of Body)

Supplied in standard 2.44m lengths.

Material : Cold rolled mild steel sheet

Thickness : 1.2 mm.

Width : 100, 150, 200 mm.

Height : 50, 100 mm.

Advantages : 1) Ventilation around the cables

Advantages : 2) Protect cables from falling object

Advantages : 3) Flexible cable management network /Invisible cable inside.

Finishing and pretreatment : Zinc Phosphate with Epoxy/Polyester Powder paint.

Electro-Galvanized with Epoxy/Polyester Powder paint.

Applicable Area : Indoor / Interior Installations / Network computer sever rooms




ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)	WEIGHT COVER (kg)
TIC-PERM-ST-50-100-2.44	1.2	100	50	3.92	2.92
TIC-PERM-ST-100-100-2.44	1.2	100	100	5.82	2.92
TIC-PERM-ST-100-150-2.44	1.2	150	100	6.46	3.82
TIC-PERM-ST-100-200-2.44	1.2	200	100	7.08	5.34

90 DEGREE HORIZONTAL ELBOWS

Order connector separately for joining

M6 x 15 mml screw. (EG Type)

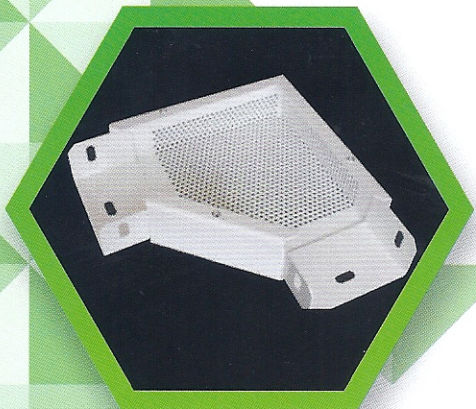


ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)	WEIGHT COVER (kg)
TIC-PERM-90HB-50-100	1.2	100	50	0.58	0.30
TIC-PERM-90HB-100-100	1.2	100	100	0.84	0.30
TIC-PERM-90HB-100-150	1.2	150	100	1.15	0.45
TIC-PERM-90HB-100-200	1.2	200	100	1.50	0.60

STRAIGHT PERFORATED TRAY MEDIUM HEIGHT

NEW PRODUCT

90 DEGREE VERTICAL INSIDE


Order connector separately for joining
M6 x 15 mml screw. (EG Type)

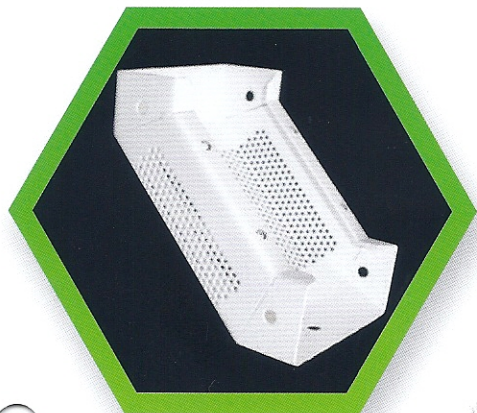

ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)	WEIGHT COVER (kg)
TIC-PERM-90VI-50-100	1.2	100	50	0.34	0.16
TIC-PERM-90VI-100-100	1.2	100	100	0.35	0.16
TIC-PERM-90VI-100-150	1.2	150	100	0.97	0.24
TIC-PERM-90VI-100-200	1.2	200	100	1.35	0.32

90 DEGREE VERTICAL OUTSIDE


Order connector separately for joining
M6 x 15 mml screw. (EG Type)

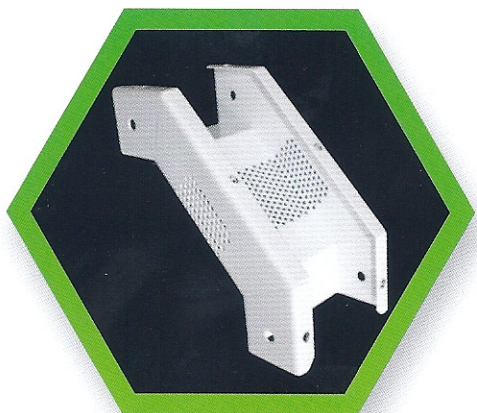

ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)	WEIGHT COVER (kg)
TIC-PERM-90VO-50-100	1.2	100	50	0.39	0.30
TIC-PERM-90VO-100-100	1.2	100	100	0.69	0.39
TIC-PERM-90VO-100-150	1.2	150	100	1.03	0.58
TIC-PERM-90VO-100-200	1.2	200	100	1.38	0.78

HORIZONTAL TEE

Order connector separately for joining
M6 x 15 mml screw. (EG Type)

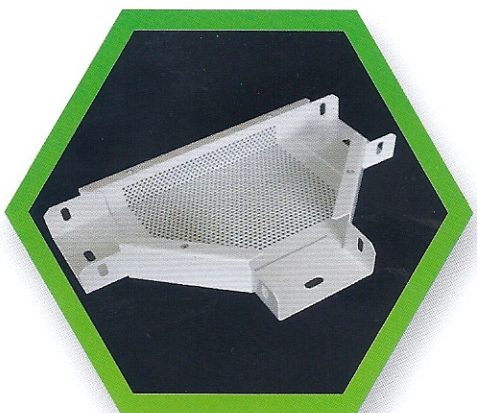


ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)	WEIGHT COVER (kg)
TIC-PERM-HT-50-100	1.2	100	50	0.77	0.40
TIC-PERM-HT-100-100	1.2	100	100	1.06	0.40
TIC-PERM-HT-100-150	1.2	150	100	1.56	0.60
TIC-PERM-HT-100-200	1.2	200	100	2.12	0.80

NEW PRODUCT

HORIZONTAL CROSS


Order connector separately for joining
M6 x 15 mml screw. (EG Type)

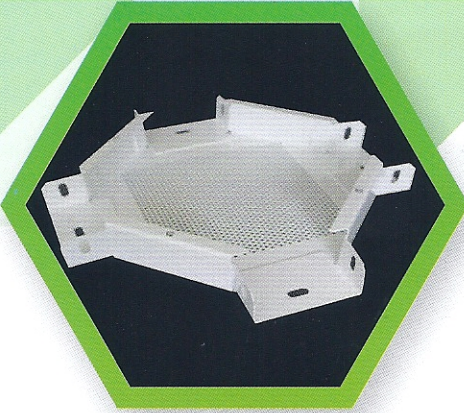

ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)	WEIGHT COVER (kg)
TIC-PERM-HX-50-100	1.2	100	50	0.59	0.52
TIC-PERM-HX-100-100	1.2	100	100	1.30	0.52
TIC-PERM-HX-100-150	1.2	150	100	1.95	0.78
TIC-PERM-HX-100-200	1.2	200	100	2.60	1.04

HORIZONTAL REDUCE

Order connector separately for joining
M6 x 15 mml screw. (EG Type)

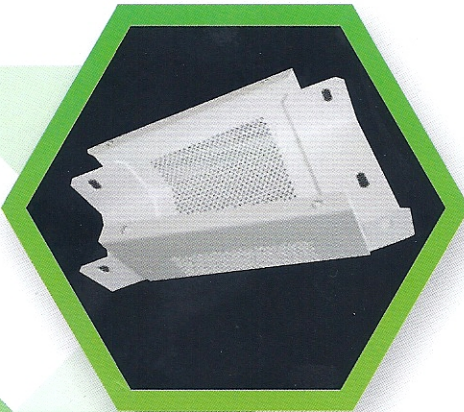

ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)	WEIGHT COVER (kg)
TIC-PERM-HR-100x100-100x50	1.2	100x100	100x50	0.62	0.22
TIC-PERM-HR-150,100x100	1.2	150x100	100x100	0.79	0.26
TIC-PERM-HR-200,W2x100	1.2	200x100	W2X100	1.18	0.39

CONNECTOR

Order connector separately for joining
M6 x 15 mml screw. (EG Type)
connector use 6 screws each



ORDER CODE	THICKNESS (mm)	WIDTH W (mm)	HEIGHT H (mm)	WEIGHT (kg)
TIC-PERM-WC-50-100	1.2	100	50	0.12
TIC-PERM-WC-100-100	1.2	100	100	0.16
TIC-PERM-WC-100-150	1.2	150	100	0.22
TIC-PERM-WC-100-200	1.2	200	100	0.25